

32" CHANNEL DRAIN FLAT GRATE SUCTION OUTLET COVER AND ABS THREE-PORT MANUFACTURED SUMP FOR VINYL



VGB CERTIFIED SPECIFICATIONS

Floor Flow Rating

316 GPM at 3.9 fps

Wall Flow Rating

208 GPM at 2.6 fps

Sump Depth

Use sump included

Open Area

25.9 in²

FEATURES

Meets or exceeds ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing

Permanently attached gasket reduces gasket alignment problems

Three ports: bottom 2½" OD, 2" ID S/S; inside 2" threaded FPT; two 2" threaded plugs included

Must use transitional glue when attaching to PVC pipe

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Online product support including downloadable CAD files, General Certificate of Conformity, third-party certificate, installation instructions and more.

Replace drain cover every five years from the date of installation

1 per case

Unblockable!



Part # 32CDFLVxxx

Two drains in one!



STANDARD COLORS

- 32CDFLV101 – White
- 32CDFLV102 – Black
- 32CDFLV103 – Light Gray
- 32CDFLV104 – Blue
- 32CDFLV105 – Dark Gray
- 32CDFLV108 – Tan

Also available as cover only
p/n 32CDFLNFVxxx
24 per case

Also available as sump only
p/n 32CDSBV101
4 per case

VGB 2008 Compliant

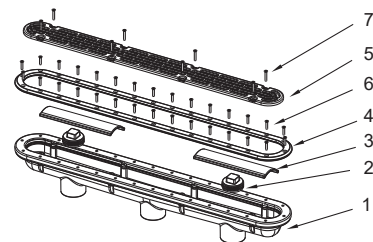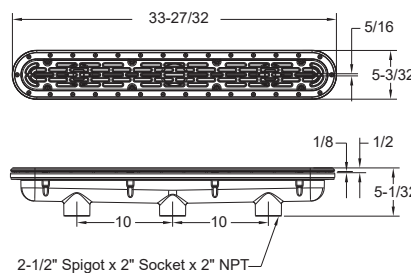

1. 32" Three-Port Manufactured Vinyl Sump Bucket With Gasket
2. 2" Tapered Threaded Pipe Plug, Qty 2
3. Port Divider
4. 32" Channel Drain Vinyl Clamping Ring With Gasket
5. 32" Channel Drain Flush Cover
6. 10 x 1" Flat Head Phillips Screw, 316 SS, Qty 20
7. 10 x 1-1/4" Flat Head Phillips Screw, 316 SS, Qty 8